

# Combitherm® CTP10-10G

## Gas Boiler-free

ALTO-SHAAM

Combining multiple cooking functions into a single appliance, Combitherm® ovens provide endless versatility, reliability and unmatched performance. An all-in-one solution for efficient and consistent food production. Combitherm ovens do the work of a convection oven, kettle, steamer, fryer, smoker and more. Execute every dish, no matter how simple or complex, faster than ever with flawless precision and consistency.



CTP10-10G

### Standard features

- Four cooking modes—steam, convection, combination, and retherm
- Programmable, touchscreen control
- Easy recipe upload/download via USB port
- Four fully automated cleaning cycles
- Front-accessible and retractable rinse hose
- LED illuminated door handle is designed for the needs of the busy kitchen, and provides visual notification of the oven status
- Absolute Humidity Control™ allows for selection any humidity level from 0-100% to maximize food quality, texture, and yield
- SafeVent™ provides automatic steam venting at the end of the cooking cycle



- 11** Eleven full size or GN 1/1 pans; eleven half-size sheet pans, one row deep
- 2** Two side racks with eleven non-tilt support rails; 11-3/4" [298mm] horizontal width between rails, 2-3/4" [70mm] vertical spacing between rails
- 120 lb [54 kg] product maximum
- 75 quarts [95 liters] volume maximum
- Five [5] wire shelves included. Additional wire shelves required for maximum capacity.

Condensable Particulate Matter (CPM) emissions produced through the most aggressive testing methods available were measured at 0.77 mg/m<sup>3</sup> for 11,660 beef patties which is below the maximum allowable level of 5.0 mg/m<sup>3</sup> established by EPA test method 202.

### Configurations (select one)

#### Door swing

- Right hinged
- Recessed door, optional; increases oven width by 5" [127mm]

#### Electrical

- 120V 1ph
- 208-240V 3ph
- 208-240V 1ph
- 380-415V 3ph

#### Gas type

- Natural
- Propane

### Accessories (select all that apply)

- CombiLatch™
- Stacking hardware
- Seismic feet package, optional
- Smoking feature, including one-step cold smoking (not available on units with security devices)
- Extended one-year warranty
- Automatic grease collection system, includes four 6-piece, self-trussing poultry racks #5014438, interior drip collection pan, and grease collection container with shut off valve

### Cleaning

- Automatic tablet-based cleaning system, standard
- Automatic liquid cleaning system, optional

### Probe choices

- Removable, single-point, quick-connect core temperature probe, standard
- Removable, single-point, quick-connect sous vide temperature probe, optional
- Hard-wired, multi-point core temperature probe, optional (factory only installed)

### Water treatment

- RO system OPS175CR/5 [5031203]

### Security devices for correctional facility use

- Optional base package [not available with recessed door]: includes tamper-proof screw package, excludes temperature probe
- Anti-entrapment device, optional
- Control panel security cover, optional
- Hasp door lock (padlock not included), optional
- Removable, single-point, quick-connect core temperature probe, optional

### Installation options (select one)


- Alto-Shaam Combination Factory Authorized Installation Program - available in the U.S. and Canada only
- Installation Start-Up Check - available through an Alto-Shaam authorized service agency



# Combitherm® CTP10-10G



## Specification

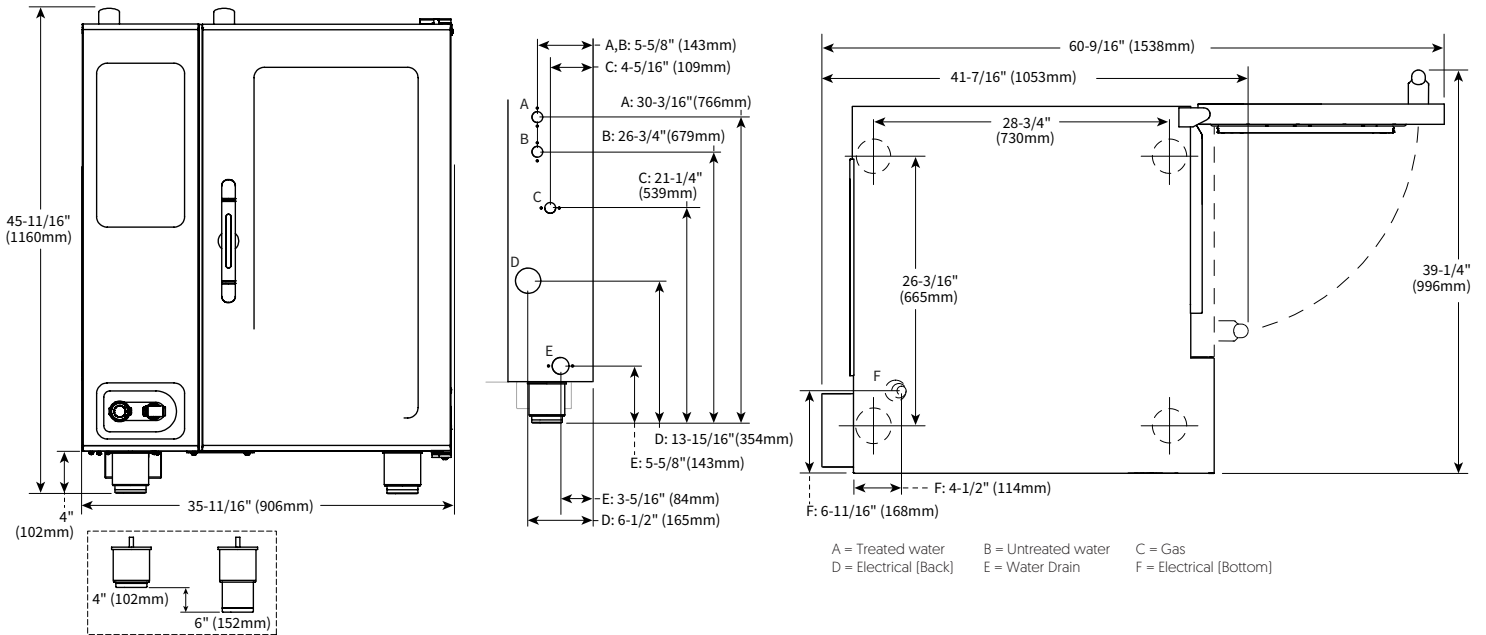

### DIMENSIONS

**Model**  
CTP10-10G

**Exterior (H x W x D)**  
45-11/16" x 35-11/16" x 41-7/16" [1160mm x 906mm x 1053mm]  
**Exterior with recessed door (H x W x D)**  
45-11/16" x 40-11/16" x 41-7/16" [1160mm x 1033mm x 1053mm]

**Interior (H x W x D)**  
31-1/2" x 16-1/4" x 28-1/16" [800mm x 411mm x 712mm]  
**Net Weight**  
625 lb [283 kg]

**Ship Dimensions (L x W x H)\***  
CTP10-10G 56" x 45" x 65" [1422mm x 1143mm x 1651mm]

**Ship Weight\***  
695 lb [315 kg]

\*Domestic ground shipping information. Contact factory for export weight and dimensions.



### CLEARANCE

Top: 20" [508mm]  
 Left: 0" [0mm]  
 18" [457mm] recommended service access  
 Right: 0" [0mm] Non-combustible surfaces  
 2" [51mm] combustible surfaces  
 Bottom: 5-1/8" [130mm]  
 Back: 4" [102mm]  
 4-5/16" [109mm] optional plumbing kit



### CHECK FIRST

- Oven must be installed level.
- Water supply shut-off valve and back-flow preventer when required by local code.
- Hood installation is required.
- Drain must not be located directly underneath the appliance.

# Combitherm® CTP10-10G



## Heat of rejection

CTP10-10E	Heat Gain qs, BTU/hr	Heat Gain qs, kW	Heat Gain qs, Mj/hr
	448	0.13	55.9



## Noise emissions

A maximum 67 dBA was measured at 3.3 ft [1 m] from unit as tested on CTP10-20E.



†	CTP10-10G	V	Ph	Hz	Awg (mm²)	ProPower™ Standard			With CombiSmoker® Option			Connection	Certification
						A	Breaker	kW	A	Breaker	kW		
†	120V**	120	1	60	12 [3.31]	6.8	20	.84	12.0	20	1.5	L1, L2/N, G	
†	208-240V	208	1*	50/60	14 [2.08]	4.8	15	1.0	7.3	15	1.5	L1, L2/N, G	
		240	1*	50/60	14 [2.08]	4.2	15	1.0	7.1	15	1.7	L1, L2/N, G	
†	208-240V	208	3	50/60	14 [2.08]	4.8	15	1.0	7.3	15	1.5	L1, L2, L3, G	
		240	3	50/60	14 [2.08]	4.2	15	1.0	7.1	15	1.7	L1, L2, L3, G	
	380-415V	380	3	50/60	14 [2.08]	4.6	15	1.0	7.2	15	1.6	L1, L2, L3, N, G	
		415	3	50/60	14 [2.08]	4.2	15	1.0	7.1	15	1.7	L1, L2, L3, N, G	

† Per UL requirements, must be permanently connected to electrical supply source

\* Electrical service charge applies

\*\* Ground fault or residual current protection device must accommodate a leakage current of 20mA.

- Electrical connections must meet all applicable federal, state, and local codes.
- For use on individual branch circuit only.
- Ovens are not supplied with an electrical cord or plug.



## Water requirements (per oven)

- Two cold water inlets - drinking quality
- One treated water inlet: 3/4" NPT connection. Line pressure 30 psi minimum dynamic and 145 psi maximum static (200-1000 kPa) at a minimum flow rate of 0.26 gpm [1 L/min].
- One untreated water inlet: 3/4" NPT connection. Line pressure 30 psi minimum dynamic and 145 psi maximum static (200-1000 kPa) at a minimum flow rate of 2.64 gpm [10 L/min]. Water drain: 1-1/2" [40mm] connection with a vertical vent to extend above the exhaust vent. Materials must withstand temperatures up to 200°F [93°C].

## Water Quality Standards

It is the sole responsibility of the owner/operator/purchaser of this equipment to verify that the incoming water supply is comprehensively tested and, if required, a means of "water treatment" provided that would meet compliance requirements with the published water quality standards shown below. Non-compliance with these minimum standards will potentially damage this equipment and/or components and void the original equipment manufacturer's warranty. Alto-Shaam recommends using the Alto-Shaam Reverse Osmosis System to properly treat your water.

Inlet Water Requirements		
Contaminant	Treated Water	Untreated Water
Free Chlorine	Less than 0.1 ppm (mg/L)	Less than 0.1 ppm (mg/L)
Hardness	30-70 ppm	30-70 ppm
Chloride	Less than 30 ppm (mg/L)	Less than 30 ppm (mg/L)
pH	7.0 to 8.5	7.0 to 8.5
Silica	Less than 12 ppm (mg/L)	Less than 12 ppm (mg/L)
Total Dissolved Solids [TDS]	50-125 ppm	50-360 ppm



## Clearance requirements for water filtration system

Do not install a water filtration system behind unit.



**Gas Requirements (gas type must be specified on order)**  
**Hook-up: 3/4" NPT**

UL Marked Appliances	Maximum Input BTU/h	Minimum Input BTU/h	Maximum Inlet Pressure Inches WC	Minimum Inlet Pressure Inches WC	Maximum Fuel Consumption*	
					CFH	GPH
Natural Gas	80,000	53,000	14.0	5.5	76.2	N/A
Propane				9.0	32	0.9

\*Assumes an average heating value for natural gas to be 1,050 BTU/SCF and a specific gravity of 0.60. The assumed value for propane gas is 2,500 BTU/SCF, and a specific gravity of 1.53.

AGA Marked Appliances	Maximum Input MJ/h	Minimum Input MJ/h	Maximum Inlet Pressure kPa	Minimum Inlet Pressure kPa	Maximum Fuel Consumption	
					m³/h	L/h
Natural Gas	84.4	55.9	3.48	1.13	2.2	N/A
Propane				2.75	0.9	3.3

CE Marked Appliances	Maximum Input		Minimum Input		Nominal Gas Pressure mbar	Maximum Gas Pressure mbar	Maximum Fuel Consumption m³
	kWh (Hs)	kWh (Hi)	kWh (Hs)	kWh (Hi)			
2E [G20]	23.3	21	15.5	14	20	50	2.6
2LL [G25]					20		2.6
3P [G31]	22.8	21	15.5	14.3	37		0.9
3B/P [G30]					29		0.9

## CONTACT US

W164 N9221 Water Street | Menomonee Falls, Wisconsin 53051 | U.S.A.  
 Phone: 262.251.3800 | 800.558.8744 U.S.A./Canada | Fax: 262.251.7067 | [alto-shaam.com](http://alto-shaam.com)