



DRINKING MACHINERY

2022-2023

LFSUSA.STORE

CONTACT US:


Customer Service

+1(786) 5847439

Sales team:
+1(786) 8602528

WEB SITE:
www.lfsusa.store

Email:
sales@lfsusa.store

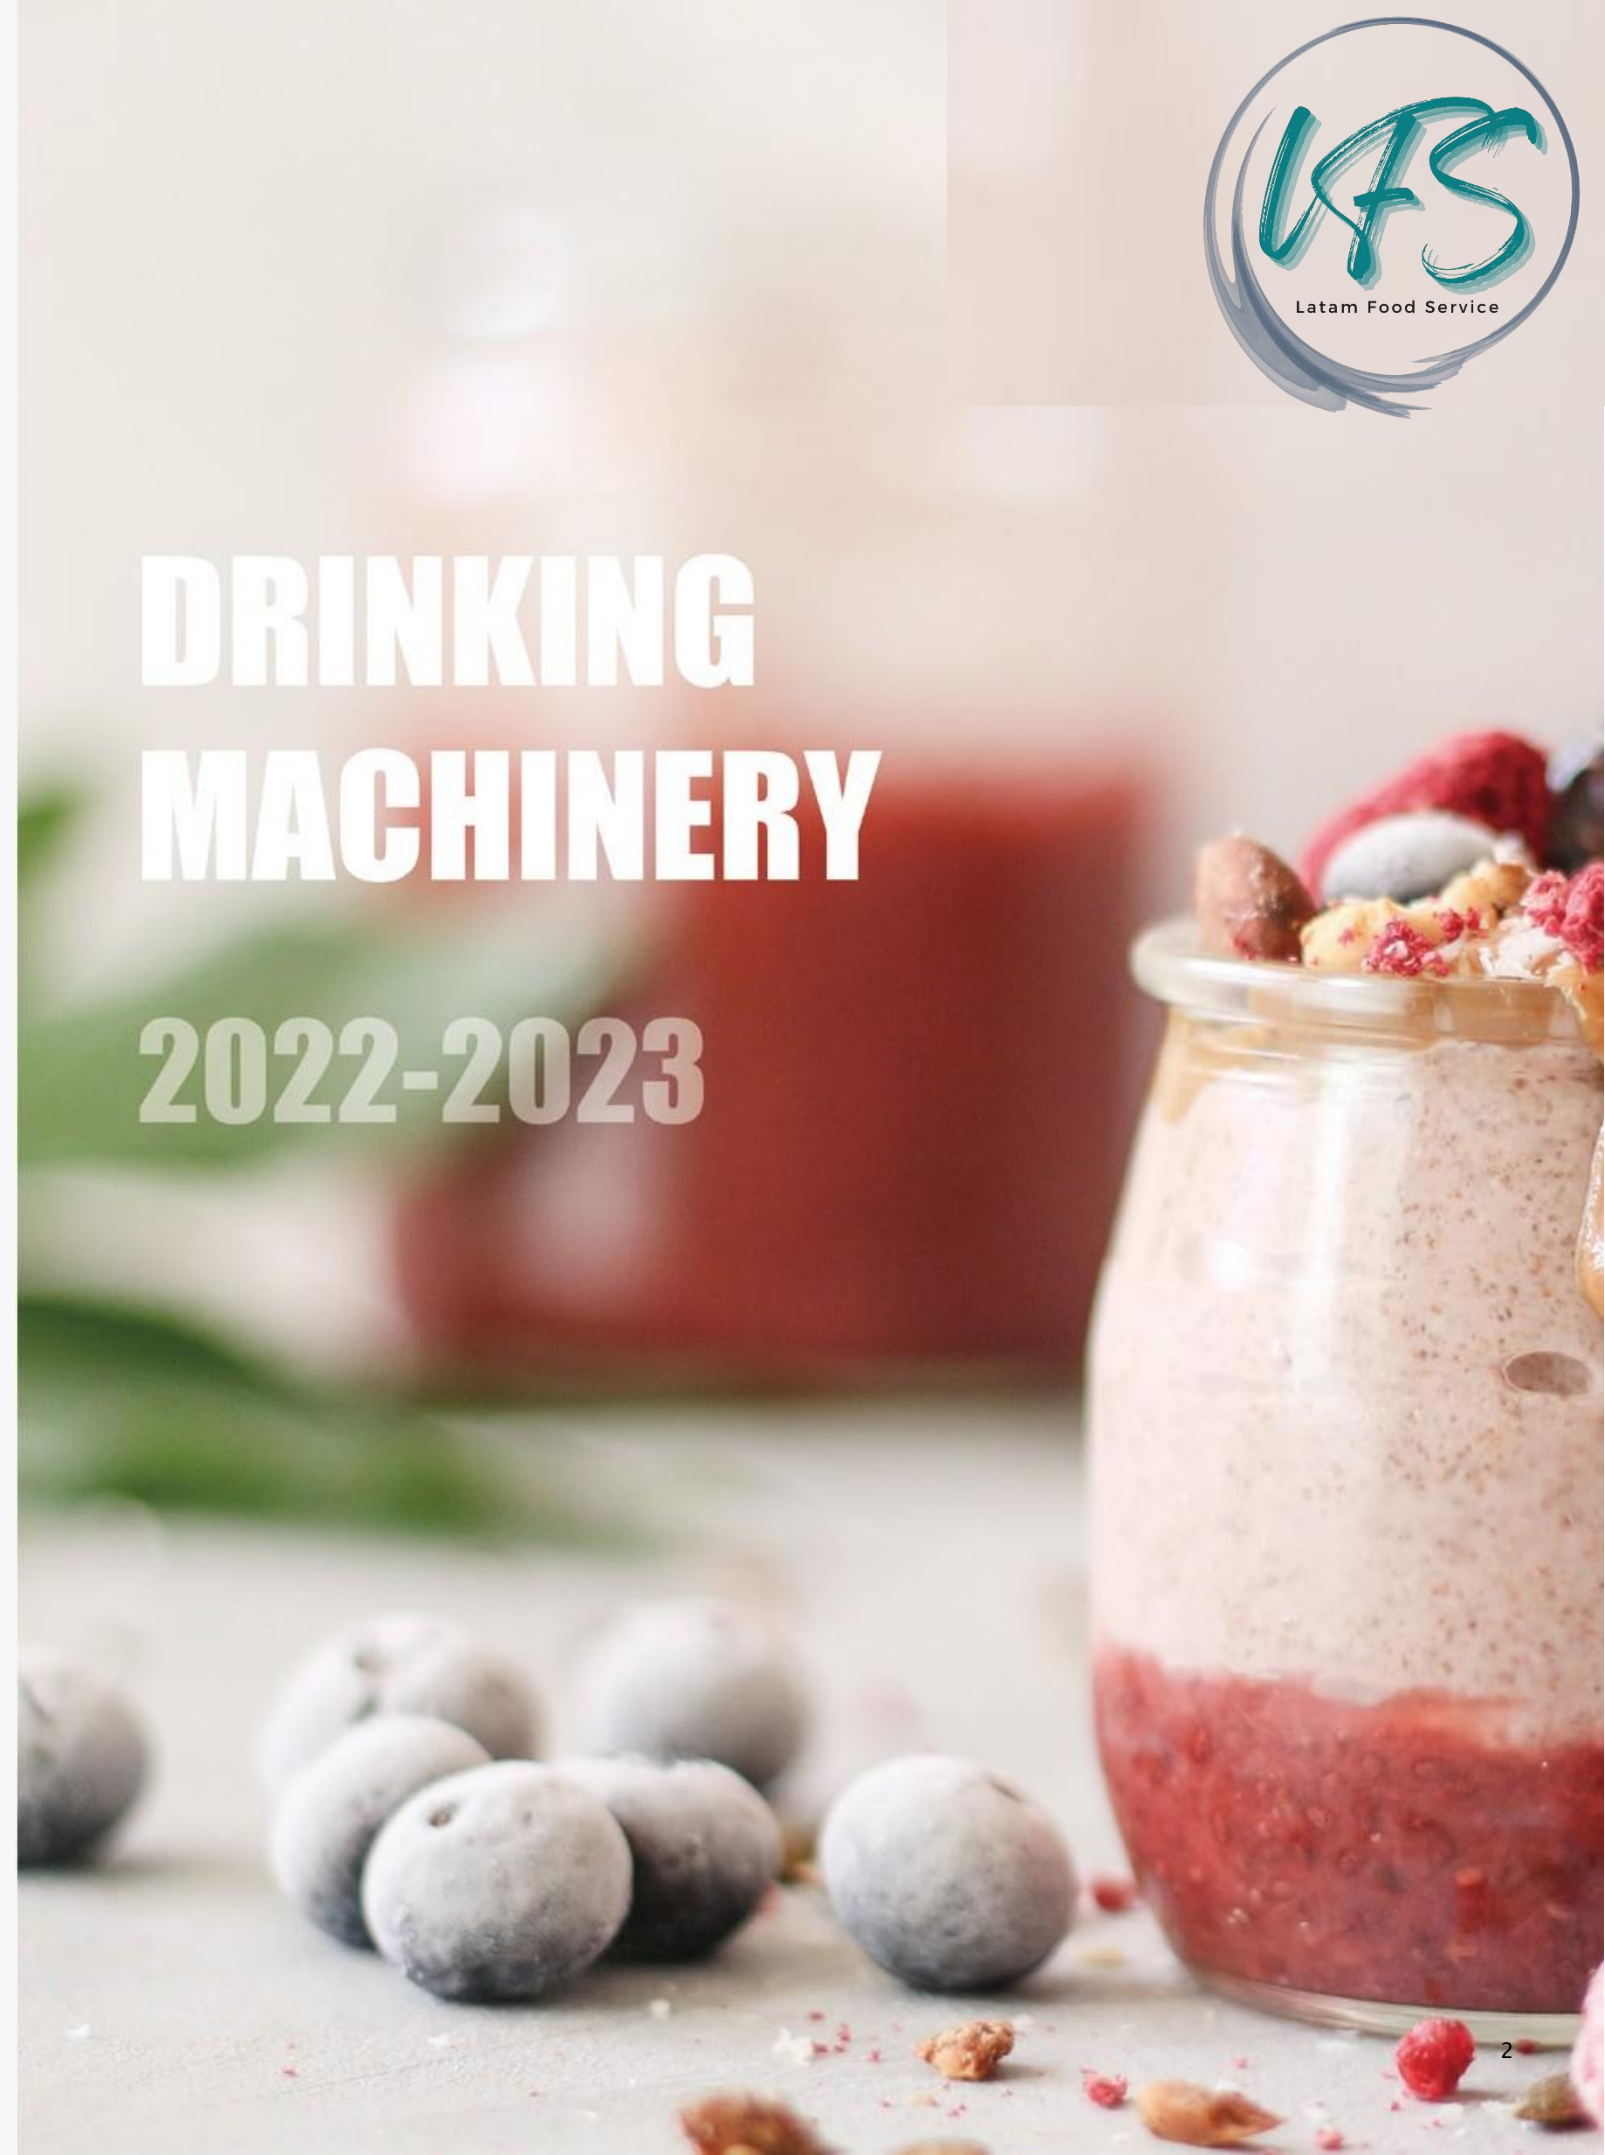



contents

Be thankful for
the past and think
about the future!
感恩过去·思考未来

03

Ice Cream Machine
03-04



09

Slush Machine
09-10



15

Hot Chocolate Dispenser
15-16



05

New Slush Machine
05-08



11

Juice Dispenser
11-14



17

Milk Dispenser
17-18





ICE CREAM
MACHINE
冰淇淋机

ICE CREAM MACHINE

冰淇淋机

- Smart control system
- Infrared sensing
- Pasteurization, 14 days clean-free
- Gear type puffing system
- Magnetic stirring device
- Alarm for the shortage of ingredients
- Using the most advanced DD motor technology, instead of gear box
- Independent pre-cool function, managing the temperature under 1°C -4°C



Model	Model π
Capacity	8*1
Temperature range	-12°C
Climate class	4
Overall Size	330*900*950
Packing Size (W x D x H) (mm)	390*960*1000
Net Weight (kg)	85
Gross Weight (kg)	100
Voltage (V)	220
Frequency/ 频率 (Hz)	50
Power/ 功率 (W)	2800
Current / 电流 (A)	13
Compressor / 压缩机 (HP)	1-1/2
Refrigerant Type/ 制冷剂	R404a
20FT Container Loading (units)	64
40FT Container Loading (units)	132



NEW SLUSH
MACHINE 新款雪融机



Slush Machine



The IFS usaSlush Machine with 12 liters bowl, and in one to three bowl configurations. Designed for chilling, freezing and serve cold and frozen drinks including slushes, granitas, sorbet, milk-based, smoothies, frozen cocktails etc. With the most advanced technology, the sugar content only requires 5% minimum. Alcohol below 20 degrees can be added into the bowl directly. The basic models are suitable for indoors use (Ambient range: 5 °C ~ 32 °C) and the models for tropical or outdoors use are available. The machine is easy-to-use, easy-to-clean and easy-to-maintain.

美科新款雪融机可用于制作冷饮、雪融、雪芭、奶昔和鸡尾酒冰沙等冷饮。配备最先进的技术，糖度要求可低至 5%，低于 20 度的酒类饮品可直接放入料桶并制作雪融基础型号可置于室内使用（环境温度 5-32℃）同时可根据需求选用室外型型号。机器使用简单，清洁与日常维护更加便捷。

NEW SLUSH MACHINE

新款雪融机

- Easy - to - use controls include a slush model with consistency control or frozen drinks model with temperature control
- Each bowl is independently controlled, and easy to take off for clean
- Removable spigot, easy to take off and clean
- Low sugar content demand 5% minimum
- Low noise level ≤60 dB
- Tropical models are available , can be operating in ambient 43 °C
- Adjustable LED light colors, provide the frozen drinks with the optimum attractive display color
- Hot gas defrost for the evaporator cylinder, avoiding freezing block on auger
- With regeneration model, keep the slushes always in a optimum consistency

- ◆ 简易控制系统，雪融机模式可调雪融稠度，冷饮模式可调节饮料温度
- ◆ 每缸可单独控制，独立运行
- ◆ 可拆卸式料开关，拆卸简单，清洁方便
- ◆ 更低糖度要求
- ◆ 噪音低于60分贝
- ◆ 室外机型可在43度的环境温度下使用
- ◆ LED灯可根据饮料颜色调整并选配最佳的展示颜色
- ◆ 具备热气化霜功能，避免搅拌因冰堵卡转

再生模式功能

New Improvements

↓60% Approximate 60% reduction on sugar demand

↓14% Approximate 14% reduction on noise level

新的改进

糖需求减少约 60 %
噪音水平降低约 14 %



Model/ 型号	MODEL X I	MODEL X II	MODEL X III
Temperature (Slush Model) / 雪融模式温度	-2°C ~ -12 °C	-2°C ~ -12 °C	-2°C ~ -12 °C
Temperature (Beverage Model) / 饮料模式温度	1°C ~ 7 °C	1°C ~ 7 °C	1°C ~ 7 °C
Ambient Range/ 使用环境	5 °C ~ 32 °C Indoors use only	5 °C ~ 32 °C Indoors use only	5 °C ~ 32 °C Indoors use only
Capacity/ 容积 (L)	12x1	12x2	12x3
Rated Power/ 功率 (W)	430	886	1250
Voltage/ 电压 (V)	220-240/110	220-240/110	220-240/110
Frequency/ 频率 (Hz)	50/60	50/60	50/60
Refrigerant/ 制冷剂	R290/R404a	R290/R404a	R290/R404a
Dimensions/ 外形尺寸 (H) x (W) x (D) (mm)	940 x 280 x 610	940 x 496 x 610	940 x 714 x 610
Packing Sizes/ 包装尺寸 (H) x (W) x (D) (mm)	1050 x 345 x 610	1050 x 560 x 610	1050 x 780 x 610
20FT Container Loading (units)	128	80	62
40FT Container Loading (units)	272	160	120

Model/ 型号	MODEL X I Turbo	MODEL X II Turbo	MODEL X III Turbo
Temperature (Slush Model) / 雪融模式温度	-2°C ~ -12 °C	-2°C ~ -12 °C	-2°C ~ -12 °C
Temperature (Beverage Model) / 饮料模式温度	1°C ~ 7 °C	1°C ~ 7 °C	1°C ~ 7 °C
Ambient Range/ 使用环境	5 °C ~ 43 °C Outdoors use	5 °C ~ 43 °C Outdoors use	5 °C ~ 43 °C Outdoors use
Capacity/ 容积 (L)	12x1	12x2	12x3
Rated Power/ 功率 (W)	/	/	/
Voltage/ 电压 (V)	220-240/110	220-240/110	220-240/110
Frequency/ 频率 (Hz)	50/60	50/60	50/60
Refrigerant/ 制冷剂	R290/R404a	R290/R404a	R290/R404a
Dimensions/ 外形尺寸 (H) x (W) x (D) (mm)	940 x 280 x 610	940 x 496 x 610	940x 714 x 610
Packing Sizes/ 包装尺寸 (H) x (W) x (D) (mm)	1050 x 345 x 610	1050x 560 x 610	1050 x 780 x 610
20FT Container Loading (units)	128	80	62
40FT Container Loading (units)	272	160	120

SLUSH MACHINE 雪融机



Slush Machine



Various frozen drinks could be served by MyGranita, such as slushes, milkshake, sorbet, frozen cocktail etc...

可用于制作冷饮、雪融、雪芭、奶昔和鸡尾酒冰沙等冷饮

SLUSH MACHINE

雪融机



- High-end and luxurious design, more attractive
- Food grade high density anti-cracking polycarbonate container, BPA free
- Easy - to -use controls include a slush model with consistency control or frozen drinks model with temperature control
- Each bowl is independently controlled
- High quality metal handle
- LED light illumination
- Drip tray with float indicator
- Removable tank and handle, easy to clean
- Except for four basic metallic colors (black, red, green and dark grey), other customized colors are available

- 高档豪华的外观设计，更具吸引力
- 食品级高密度防爆 PC 料桶，不含双酚 A
- 简易控制面板，雪融模式可调雪融机稠度，果汁模式可调温度
- 每缸可独立控制，单独运行
- 高品质金属把手，更具质感
- 每缸配有 LED 灯照明
- 接水盒配有防溢满浮标
- 可拆卸式料桶和把手，清洁简单
- 外观颜色可选黑色、红色、绿色和太空灰，另可定制颜色



Model/ 型号	MyGranita-1S	MyGranita-2S	MyGranita-3S
Temperature/ 温度范围	-2℃ ~ -10℃	-2℃ ~ -10℃	-2℃ ~ -10℃
Capacity/ 容积 (L)	12x1	12x2	12x3
Rated Power/ 功率 (W)	400	740	1150
Voltage/ 电压 (V)	220-240/110	220-240/110	220-240/110
Frequency/ 频率 (Hz)	50/60	50/60	50/60
Refrigerant/ 制冷剂	R290/R134a	R290/R404a	R290/R404a
Dimensions/ 外形尺寸 (H) x (W) x (D) (mm)	810 x 270 x 515	810 x 470 x 515	810 x 670 x 515
Packing Sizes/ 包装尺寸 (H) x (W) x (D) (mm)	985 x 350 x 590	985 x 550 x 590	985 x 750 x 590
Net Weight/ 净重 (kg)	31.9	50.7	66.2
Gross Weight/ 毛重 (kg)	41.2	63.1	85.7
20FT Container Loading (units)	128	80	62
40FT Container Loading (units)	272	160	120

JUICE
DISPENSER
果汁机



Juice Dispenser

All kinds of fruit juice



JUICE DISPENSER

果汁机



- High transparent, high density anti-cracking polycarbonate bowl, BPA free
- High quality hermetic compressor with low noise less than 55 db
- Reliable, durable magnetic paddles system, stirring the juice quietly and smoothly, maintaining the best taste of juice. Avoiding the leaking & motor problem caused by the traditional mixing motor (Stirring Type)
- Reliable, durable spray system, maintaining the best taste of juice (Jet Type)
- Environment-friendly CFC-free refrigerant R134a or R290
- Controlled by digital controller, precisely and individually managing the temperature of each bowl, making sure even cooling, avoiding ice block on the evaporating cylinder once one of the bowls run out
- High-end mirror stainless steel front panel matching different colors of the plastic side panels, lids. (S/S side panels for options)
- Except for five basic side panel colors (black, yellow, green, grey and white), other customized colors are available

- ◆ 进口食品级高密度防爆 PC 料桶，不含双酚 A
- ◆ 高质量封闭式压缩机，节能安全，噪音低于 55db
- ◆ 可靠耐用的磁力搅拌系统，搅拌均匀，低噪音，保持果汁的最佳口感，避免了传统搅拌机漏液故障问题（搅拌款）
- ◆ 可靠耐用的喷射式系统，保持果汁的最佳口感（喷射款）
- ◆ 采用 R134a 或 R290 制冷剂，无氟环保
- ◆ 采用数字控制器，精确、独立控制每个料桶的温度，确保温度均匀，避免料桶蒸发缸结冰
- ◆ 镜面不锈钢前面板配套不同颜色的塑料侧板、顶盖。(S/S 侧板供选择)
- ◆ 外观颜色可选黑色、黄色、绿色、灰色和白色，另可定制颜色




Model/ 型号 (Stirring Type)	Corolla-1S	Corolla-2S	Corolla-3S
Temperature/ 温度范围	3 °C ~ 8 °C	3 °C ~ 8 °C	3 °C ~ 8 °C
Capacity/ 容积 (L)	12x1	12x2	12x3
Rated Power/ 功率 (W)	330	340	510
Voltage/ 电压 (V)	220-240/110	220-240/110	220-240/110
Frequency/ 频率 (Hz)	50/60	50/60	50/60
Refrigerant/ 制冷剂	R290/R134a	R290/R134a	R290/R134a
Dimensions/ 外形尺寸 (H) x (W) x (D) (mm)	640 x 230 x 430	640 x 430 x 430	640 x 630 x 430
Packing Sizes/ 包装尺寸 (H) x (W) x (D) (mm)	720 x 340 x 540	720 x 540 x 540	720 x 740 x 540
Net Weight/ 净重 (kg)	20	28	36
Gross Weight/ 毛重 (kg)	22	31	40
20FT Container Loading (units)	204	120	90
40FT Container Loading (units)	420	264	198

Model/ 型号 (Jet Type)	Royal-1P	Royal-2P	Royal-3P
Temperature/ 温度范围	3 °C ~ 8 °C	3 °C ~ 8 °C	3 °C ~ 8 °C
Capacity/ 容积 (L)	12x1	12x2	12x3
Rated Power/ 功率 (W)	346	372	558
Voltage/ 电压 (V)	220-240/110	220-240/110	220-240/110
Frequency/ 频率 (Hz)	50/60	50/60	50/60
Refrigerant/ 制冷剂	R290/R134a	R290/R134a	R290/R134a
Dimensions/ 外形尺寸 (H) x (W) x (D) (mm)	640x 230x 430	640 x 430 x 430	640 x 630 x 430
Packing Sizes/ 包装尺寸 (H) x (W) x (D) (mm)	720 x 340 x 540	720 x 540 x 540	720 x 740 x 540
Net Weight/ 净重 (kg)	20	28	36
Gross Weight/ 毛重 (kg)	22	31	40
20FT Container Loading (units)	204	120	90
40FT Container Loading (units)	420	264	198



HOT CHOCOLATE DISPENSER

多功能热饮机

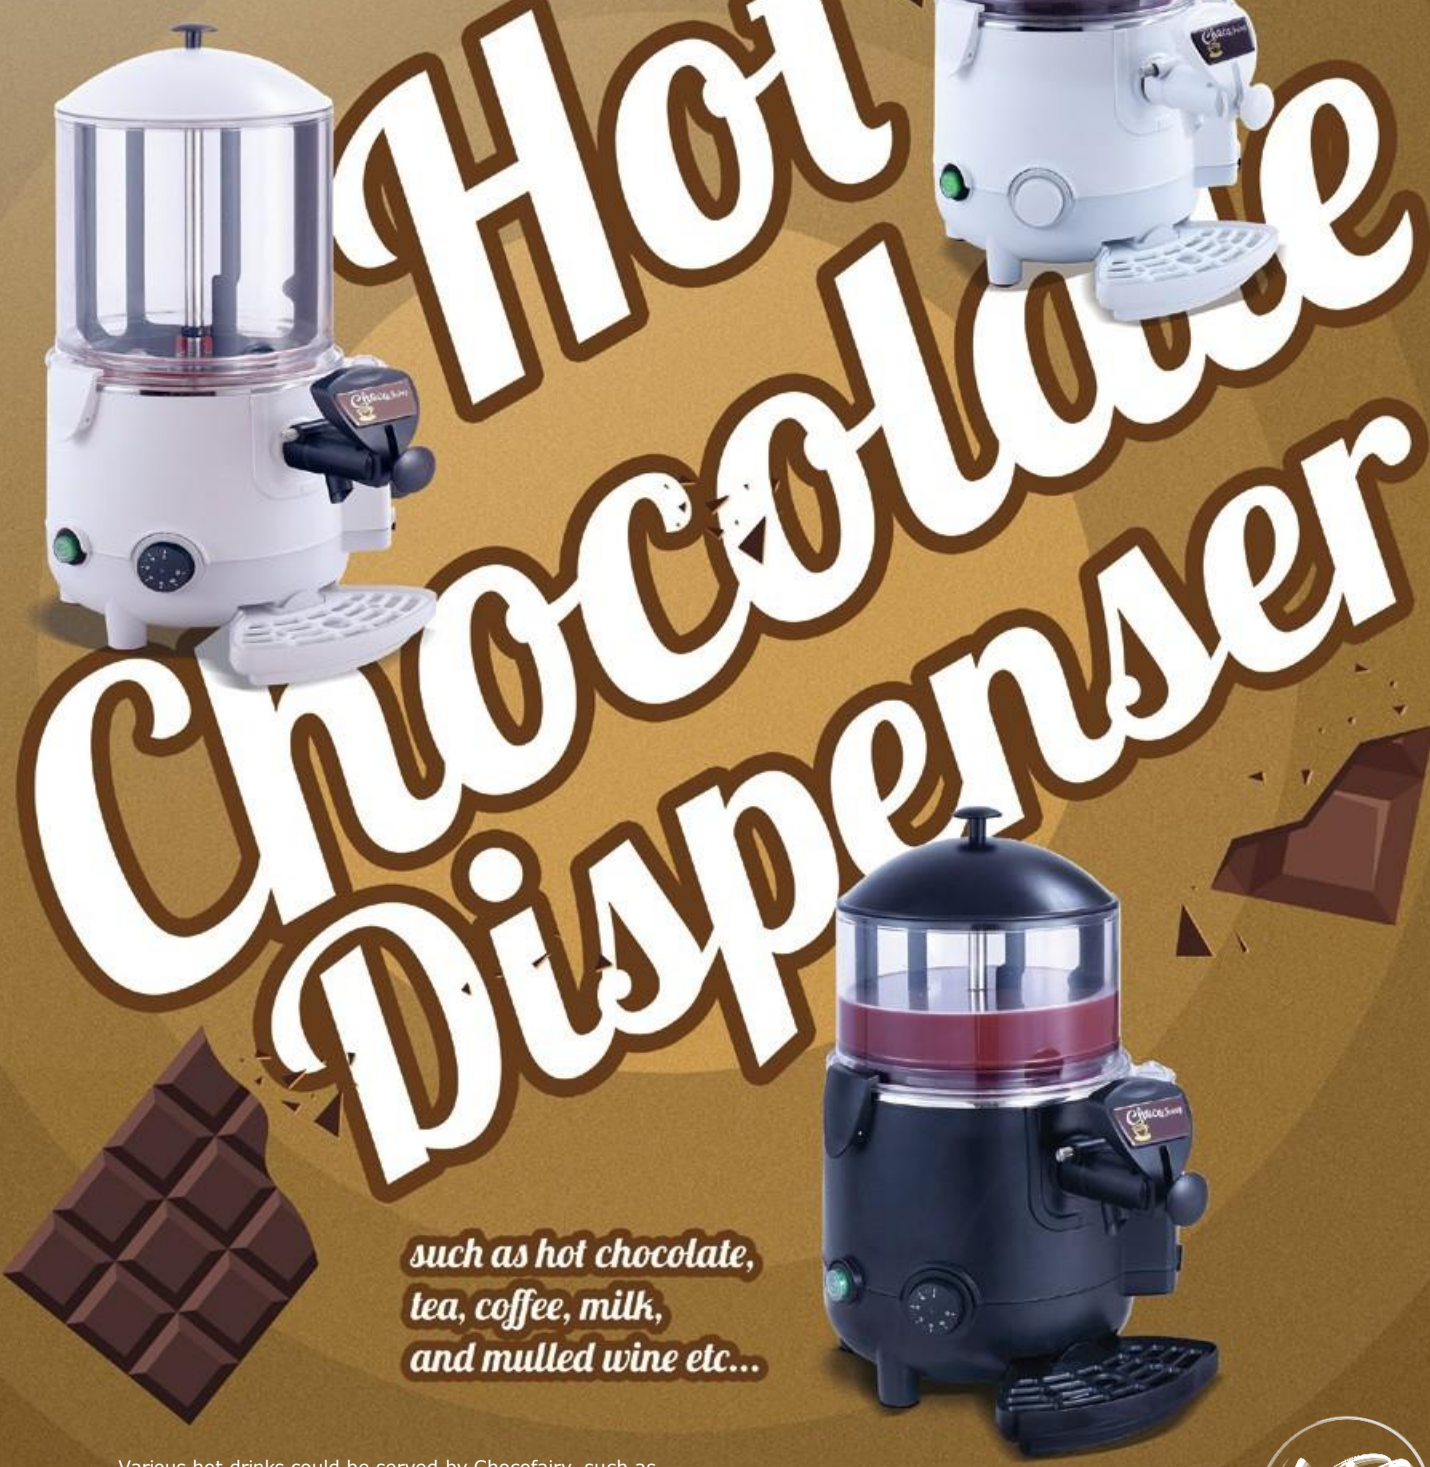

such as hot chocolate, tea, coffee, milk, and mulled wine etc...

Various hot drinks could be served by Chocofairy, such as hot chocolate, tea, coffee, milk, and mulled wine etc...

本产品可制作多种热饮，如热巧克力，热豆浆，茶，咖啡，牛奶、葡萄酒和清酒等。



HOT CHOCOLATE DISPENSER

多功能热饮机



- Lovely in design, suitable for varied kinds of stores
- BPA-free food-grade high density polycarbonate bowl, easy to remove and clean
- #304 SS Stainless steel water boiler with thermal protector
- Drip tray with indicator warning when full
- Bain-marie heating system, continuous stirring maintains a perfect, lump-free consistency
- Digital thermostat with wide controlled range of temperature from 65°C to 90 °C
- Patented anti-clogging faucet
- Two colors are available : Black and White

- ◆ 外观设计可爱，美观
- ◆ 食品级高密度 PC 料桶，不含双酚 A，易于拆卸和清洁
- ◆ 配置热保护器的 304 不锈钢加热锅
- ◆ 接水盒配有防溢满浮标
- ◆ 水沐式加热系统，持续不断的搅拌设计，出品更为细腻，口感更好
- ◆ 采用电子式温控器，制热范围可达 65°C 到 90°C
- ◆ 专利的防堵塞龙头设计
- ◆ 两种颜色可选：黑色和白色

New Improvements

Added alarm function for the shortage of water, avoiding heating without water

新的改进 增加报警功能，防止干烧



COLOUR
颜色 BLACK 黑色 WHITE 白色



Model/ 型号	Chocofairy-5L	Chocofairy-10L
Temperature/ 温度范围	85 °C	85 °C
Capacity/ 容积 (L)	5	10
Rated Power/ 功率 (W)	1006	1006
Voltage/ 电压 (V)	220-240/110	220-240/110
Frequency/ 频率 (Hz)	50/60	50/60
Dimensions/ 外形尺寸 (H) x (W) x (D) (mm)	465 x 280 x 410	580 x 280 x 410
Packing Sizes/ 包装尺寸 (H) x (W) x (D) (mm)	525 x 385 x 385	645 x 385 x 385
Net Weight/ 净重 (kg)	7.3	8
Gross Weight/ 毛重 (kg)	9.2	10.2
20FT Container Loading (units)	360	270
40FT Container Loading (units)	930	744

Milk Dispenser



MILK
DISPENSER
牛奶机



MILK DISPENSER 牛奶机



- ◎ Maintains foodsafe 1°C -4°C
- ◎ It is professionally certified to meet the requirements of EU for "materials in contact with food"
- ◎ Easy to clean: Removable bowl, paddle, handle and valve.
 - The mechanism used to turn the paddle cannot be contaminated with milk
- ◎ Low energy EC fan motor from German brand leader EBM Papst is also IP rated to offer protection against liquid ingress
- ◎ Digital controller
- ◎ Automatic defrost
- ◎ R600a refrigerant is more efficient with zero ODP (ozone depletion) and negligible GLOBAL warming potential

- ◆ 保持食品安全温度 1°C -4°C
- ◆ 经过专业认证，符合欧盟牛奶与果汁的“与食品接触的材料拆卸桶盖法规”
- ◆ 控制搅拌叶转动的电器件不会被牛奶污染
- ◆ 德国 B M Paps 的低能耗防水 EC 风机，可提供防止液体进入的保护
- ◆ 数字温控自动除霜
- ◆ R600a 制冷剂更高效零 ODP (臭氧损耗)，更环保



Model/ 型号	MILK3000
Temperature/ 温度范围	1°C ~ 4°C
Capacity/ 容积 (L)	3
Rated Power/ 功率 (W)	70
Voltage/ 电压 (V)	220-240/110
Frequency/ 频率 (Hz)	50/60
Refrigerant/ 制冷剂	R600a
Dimensions/ 外形尺寸 (H) x (W) x (D) (mm)	590 x 310 x 345
Packing Sizes/ 包装尺寸 (H) x (W) x (D) (mm)	655 x 435 x 365
Net Weight/ 净重 (kg)	14
Gross Weight/ 毛重 (kg)	16
20FT Container Loading (units)	240
40FT Container Loading (units)	501